


PDU
(POWER DISTRIBUTION UNIT)

SYMMETRA PX 40kW
3 PHASE

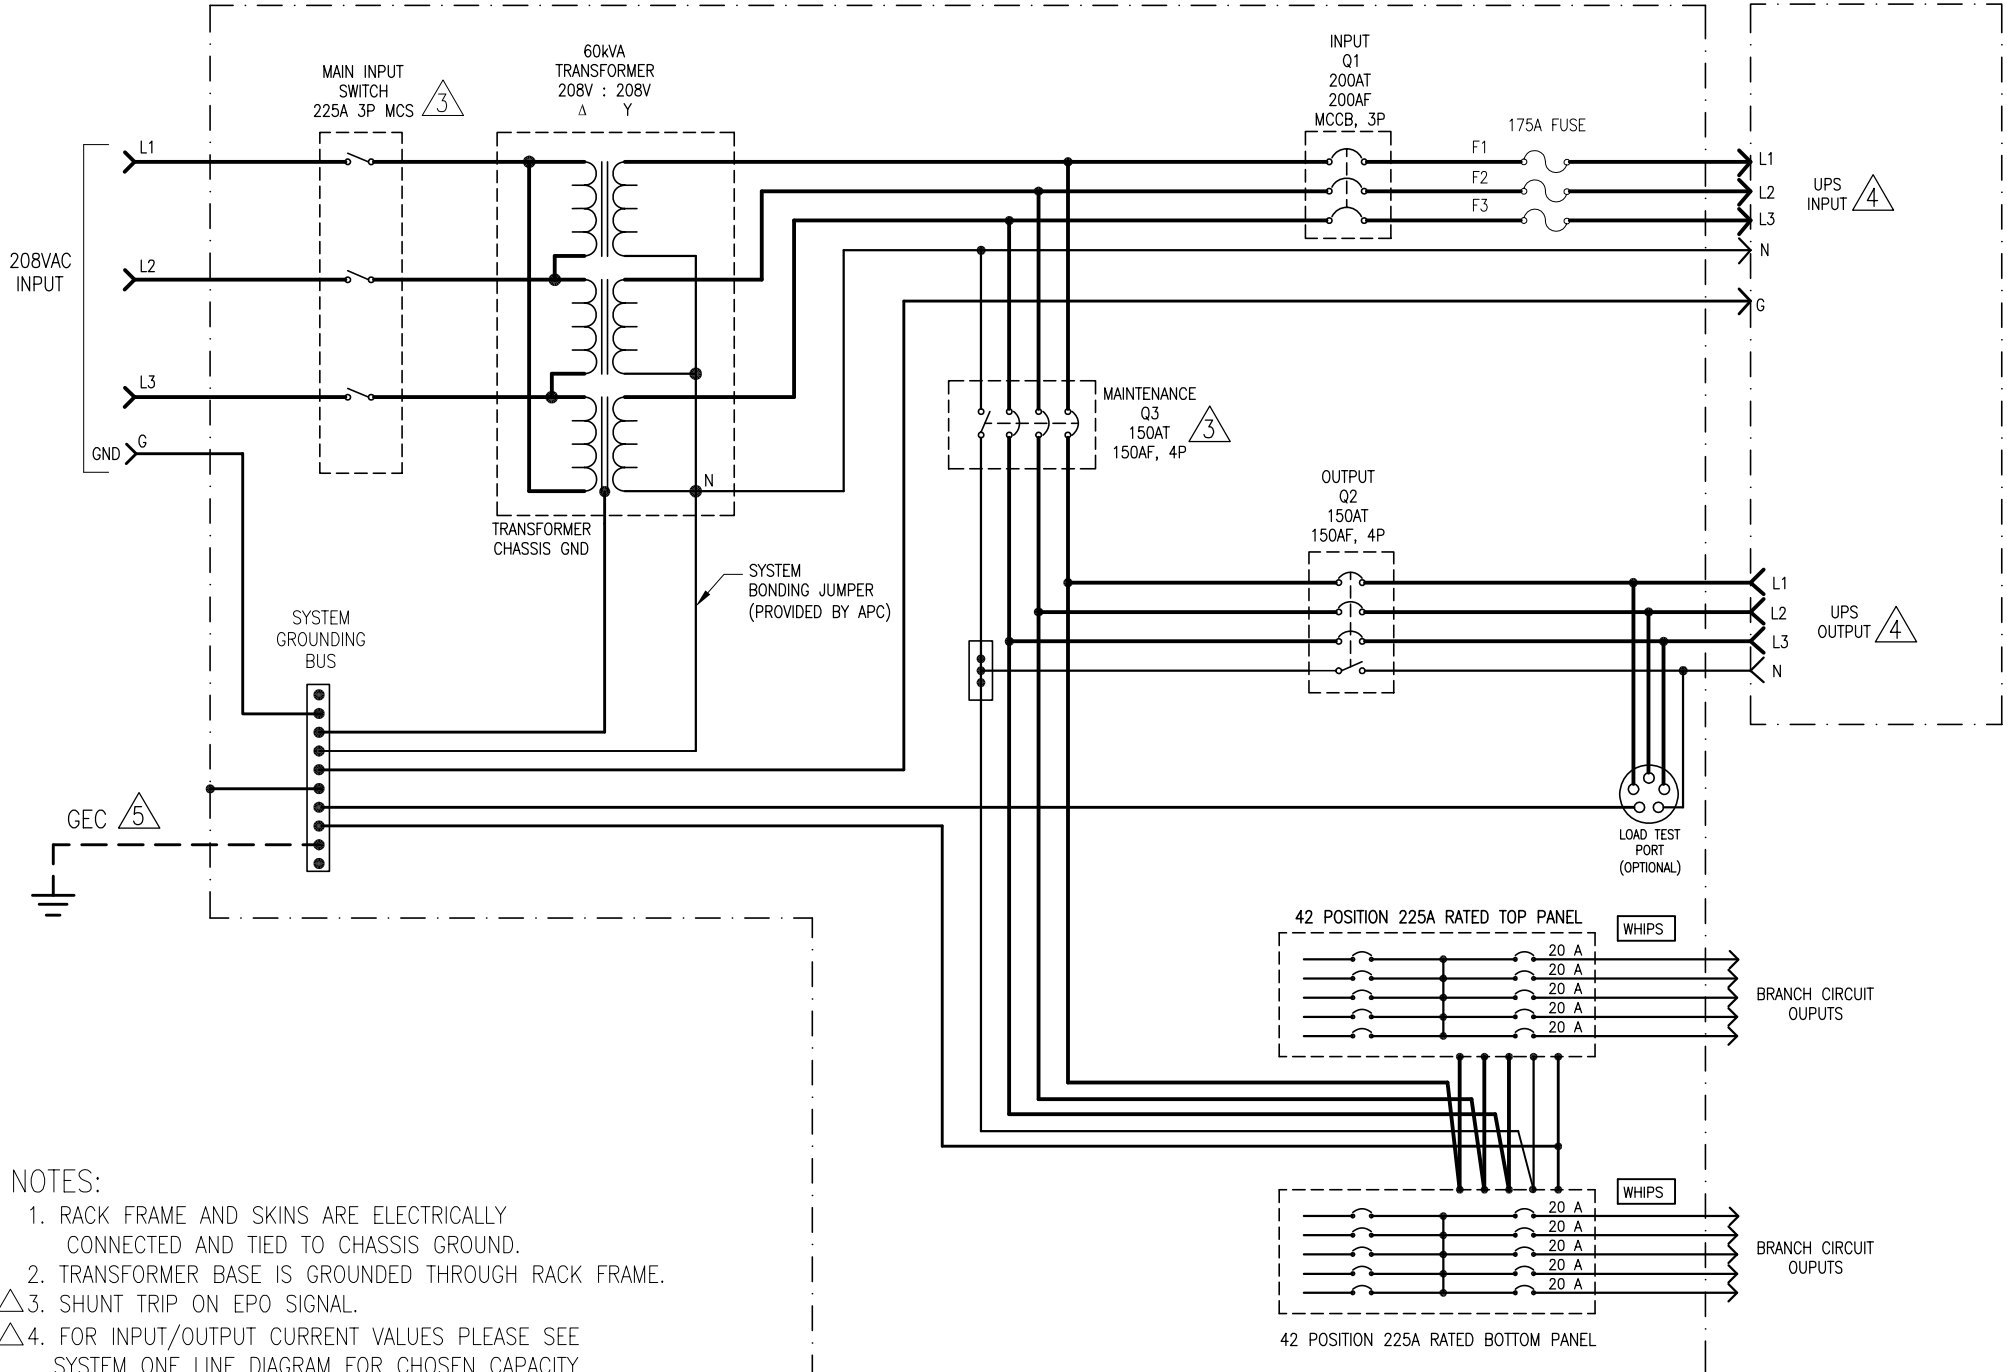

NOTES:

1. RACK FRAME AND SKINS ARE ELECTRICALLY CONNECTED AND TIED TO CHASSIS GROUND.
2. TRANSFORMER BASE IS GROUNDED THROUGH RACK FRAME.
- △3. SHUNT TRIP ON EPO SIGNAL.
- △4. FOR INPUT/OUTPUT CURRENT VALUES PLEASE SEE SYSTEM ONE LINE DIAGRAM FOR CHOSEN CAPACITY.
- △5. THIS SYSTEM SHALL BE INSTALLED AS A SEPARATELY DERIVED SYSTEM IN ACCORDANCE WITH LOCAL AND NATIONAL CODES THE GROUNDING ELECTRODE CONDUCTOR (GEC) IS PROVIDED BY OTHERS

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF AMERICAN POWER CONVERSION AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM APC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE: InfraStruXure 40kW
INPUT: 208V, 3PH, SINGLE FEED
OUTPUT: 208V, 40kW
PDU WITH TRANSFORMER
FIVE LINE DIAGRAM
PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 1

DWG NO: ISX-PDU40F1XF-5L REV. 11
DRAWN BY: BALAMURUGAN 01/17/07
CHECKED BY: J.RING 01/17/07
ENGINEER: B.SHERIDAN / E.SILVA 01/17/07

